JU 1 S RF KNX

Item no.: 4941651



KNX UP-/UP-Funk-Aktoren

Description

- Flush-mounted 1-way blind actuator 5 A, KNX RF, Data Secure
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- For controlling drives for blinds, roller blinds, sun and vision protection devices, skylights, and ventilation flaps
- Integrated automatic ventilation function
- Secure communication via KNX-RF with support from KNX Data Secure
- Easy installation due to the compact housing
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload
- The binary inputs are assigned to the output as standard (function test before programming)



Technical data

	JU 1 S RF KNX
Operating voltage KNX	Bus voltage
Operating voltage	230 - 240 V AC 50 - 60 Hz
Frequency	50 – 60 Hz
Installation type	Flush-mounted
Type of connection	Screw terminals


	JU 1 S RF KNX
Number of channels	1
Туре	Base module
Protection class	II

JU 1 S RF KNX


Item no.: 4941651




Connection example



Scale drawings

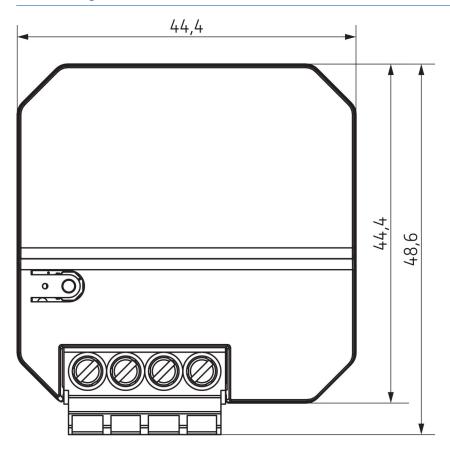

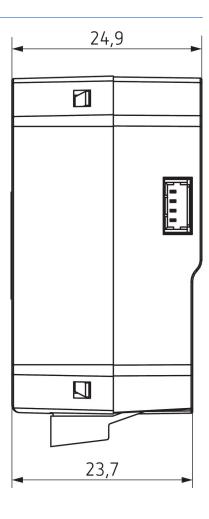

JU 1 S RF KNX

Item no.: 4941651



Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP 65

Item no.: 9070459



Flush-mounted temperature sensor

Item no.: 9070496



number of available products.